


## MF 6" Down Light Specification

**Model NO.: MF-600F184**

Cut out:

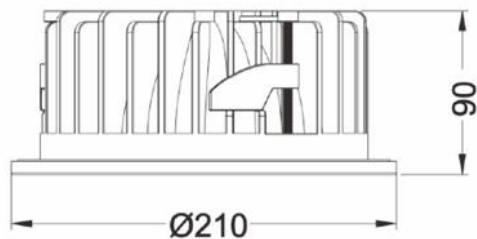

Fixed COB Series

**UGR:19 KN<10% CRI>83**



IEC62031  
IEC60598-1  
IEC60598-2  
IEC61347  
Comply with Energy Star SSL

ErP

CE



EPISTAR

LIFUD




**Product SPEC:**

<b>Input voltage</b>	220-240Vac, 50hz/60hz
<b>Product Size</b>	D210* 90mm
<b>Cut out Size</b>	Φ 118mm
<b>Power(watt)</b>	22W/30W
<b>Color temperature</b>	3000K / 4000K / 5000K / 6000K
<b>LED Chip</b>	EPISTAR / SAMSUNG
<b>LED Driver</b>	Lifud (IP44) / Meanwell (IP65)
<b>PF</b>	≥0.95
<b>Housing Colour</b>	White RAL9003
<b>Luminous Flux (lm)</b>	22W:1900lm @3000K, 2000lm@4000K, 2100lm@5000K 30W: 2700lm @3000K, 2800lm@4000K, 2900lm@5000K
<b>CRI (Ra)</b>	>83
<b>Lifespan</b>	≥50000hrs
<b>Beam Angle</b>	80°
<b>Material</b>	Aluminum
<b>Operating Temperature</b>	-20°C ~50°C
<b>Dimmable</b>	Available
<b>IP</b>	IP20, IP44, IP65 for optional
<b>Certificate</b>	CE/RoHS
<b>Warranty Period</b>	5 years

**Package:**




**Packing Size: (CM)**




**24(D1)\*23(F1)\*12cm(H1)/PCS**

**N.W: 1.2KG, G.W: 1.6 KG**

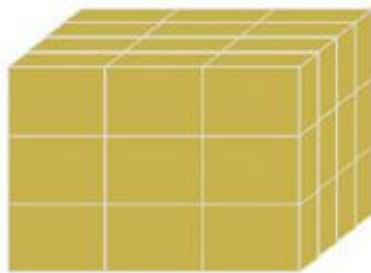

**12PCS/CTN**

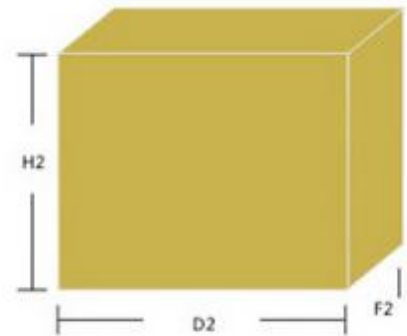

**51(D2)\*49.5(F2)\*38.5cm(H2)/12PCS**

**N.W: 16.5KG, G.W: 17.9KG**

**Job reference photos by Ming Feng:**

