



# Ming Feng Lighting Co.,Ltd

**Address:** 2nd Floor, Building 2, Zao San Street 5th, Dongcheng District, Dongguan City, Guangdong province, China

**Tel:** 0086-769-2332-0862 **Fax:** 0086-769-2332-0862

**Email address:** mf@mingfeng-lighting.com



## LED Tri-proof light

### APPLICATION:



**Item No.**

**MF24-600**

### Optical Data

### Electrical Data

LED Type	Everlight SMD chip	Power Supply	CE driver
System Efficacy	130lm/W(CCT=5000K)	Input Voltage	100~240VAC
Luminous Flux	2600lm(CCT=5000K)	Power Frequency	50~60Hz
CCT	3000K/4000K/5000K/6000K	Output Voltage	28.8~48VDC
Beam Angle	120°	Output Current	1.4A(Constant Current)
CRI	Ra80	Power Efficiency	>90%
System Efficiency	>90%	Power Factor	>0.94
		Total Harmonic Distortion	<10%

### Others


System Power Consumption	24W	Junction Temperature(Tj)	<65°C(Ta=25°C)
LED Power Consumption	20W	Storage Temperature	-40~+70°C
Fixture Material	ABS Difusor Material Polycarbonate Acid	Operating Temperature	-30~+50°C
Ingress Protection	IP65	Operating Humidity	15~90%RH
Luminaire Net Weight	1.0±0.3kg	Dimensions	L600XW95XH80mm
Life Span	>80000Hrs(Ta=25°C@L70)	Export Carton Size	632X243248mm,4PCS/CTN

### Optional Info.


Installation Method	Ceiling/ Hang Mounting
Fixture Color	Grey
Intelligent Control	N/A

### Physical Dimensions

### Light Distribution Curve

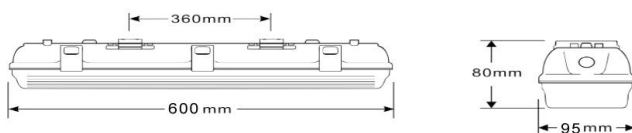

H25201-120° PC



### Packing

